

This extra-heavy-duty rotavator performs excellently in demanding conditions and is ideal for "built-on" combinations - such as Ripper, Furrower or Crumble Roller.


Side drive through heavy-duty Roller Chain - 17 ton breaking load - with externally adjustable tensioning skid. Rotor drive is supported by large ball bearings and face seals.

Protection of tractor and transmission against shock-loads ensured by heavy-duty safety clutch.

Cultivating depth is adjustable - raising/lowering the side skids.


Depth control wheels available as optional.

Selectatilt pick-off gears allow four alternative rotor speeds (540 PTO)

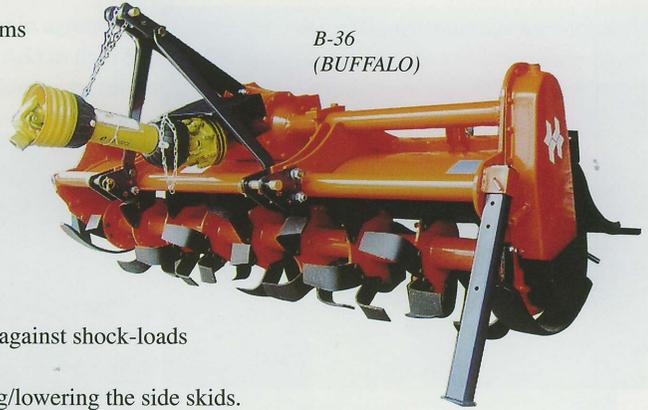


B-36
(BUFFALO)

Specifications	B - 36			
	180	205	230	255
Working width, cm	180	205	230	255
Working depth, cm	18			
For tractor hp	55-105			
3-Point Linkage, Cat.	I/II			
Universal Driveshaft	A8 w/FF4 Clutch			
Gearbox	Multispeed			
Rotor speed at 540 PTO	166/203/144/235rpm			
Side drive	Chain & sprockets			
Number of blades	42	48	54	60
Weight, kg.	510	550	590	630

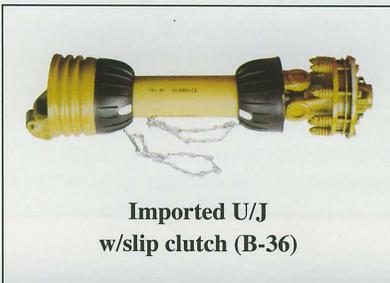

**Imported U/J
w/slip clutch (B-36)**

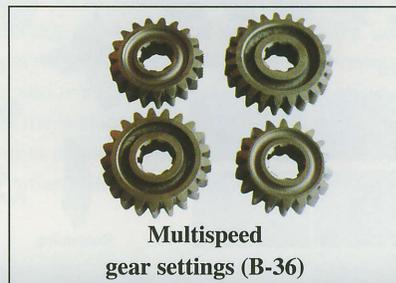

**Multispeed
gear settings (B-36)**