

# MASTERPAV™

## NON – METALLIC FLOOR HARDENER



Masterpav Non - Metallic Floor Hardener is a ready to use, dry shake silica quartz mineral aggregate suitable for both interior and exterior concrete floors where areas require additional wear resistance such as:

- Factory floors
- Commercial floors
- Car Parks for Hotels and Condominiums

### INSTALLATION PROCESS



Ready mix concrete.



After the concrete has been screeded and consolidated, the surface is floated by power trowel.



Dry shake the non-metallic floor hardener. The first application of the material should use about 2/3 of the total amount needed. The remainder of the specified amount of the premixed material should be distributed evenly over the surface.




Thoroughly float and final trowel to get a uniform color.



As soon as the surface has hardened the floor should be covered with Masterpav curing compound.



### COLOUR GUIDE

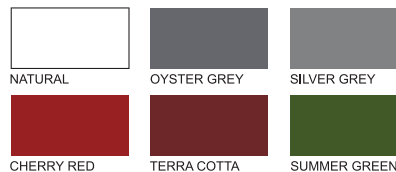

Color representation is approximate only. There will be difference in color and appearance to actual.

Exclusive Distributor:



**MASTER MATERIALS MANUFACTURING SDN BHD**  
(203747-T)

**MASTER MATERIALS MARKETING SDN BHD**  
(49327-M)

**MASTER MATERIALS CONTRACTING SDN BHD**  
(455808-T)

Lot 1826, Jalan Balakong  
Bukit Belimbing, Balakong  
43300 Selangor, Malaysia

Tel: 603 - 8961 3798, 8961 1933

Fax: 603 - 8962 2449, 8961 3385

Email: [mmm@mastermaterials.com](mailto:mmm@mastermaterials.com)