

旺晶石 MASTERPAV™ AQUATIC PEBBLES



External Wall



External Wall




External Wall

COLOR CHOICE QUARTZ



COLOR CHOICE PEBBLES

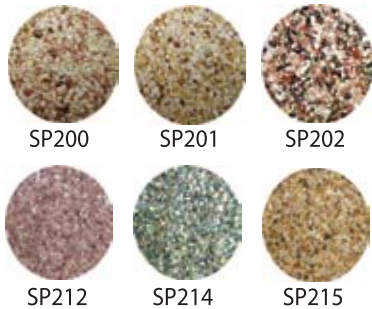

Color representation is approximate only. There will be difference in color and appearance to actual.

INSTALLATION PROCESS



STEP 1: SURFACE PREPARATION

Ensure the surface to be install is flat, clean, dry and sound.



STEP 2: Application of Masterpav Aquatic Primer AQ100.



STEP 3: Mixing of pebbles with Masterpav Aquatic Binder AQ900. Drill the materials until homogenous.



STEP 4: Installation of Masterpav Aquatic Pebbles by using a non rusty trowel. Properly compact the pebbles during installation to avoid uneven finishing.



STEP 5: Seal with Masterpav SG 60 Gloss Sealer or Masterpav Aquatic Top Coat AQ200 by using a roller or brush.



COMPLETED JOB



Exclusive Distributor:



MASTER MATERIALS MANUFACTURING SDN BHD
(203747-T)

MASTER MATERIALS MARKETING SDN BHD
(49327-M)

MASTER MATERIALS CONTRACTING SDN BHD
(455808-W)

Lot 1826, Jalan Balakong
Bukit Belimbing, Balakong
43300 Selangor, Malaysia

Tel: 603 - 8961 3798, 8961 1933
Fax: 603 - 8962 2449, 8961 3385
Email: mmm@mastermaterials.com